


Specifications

The RG Series comes in open, half open, and closed teeth versions, meaning there is a right Rotar Sorting / Demolition Grab for truly any application.

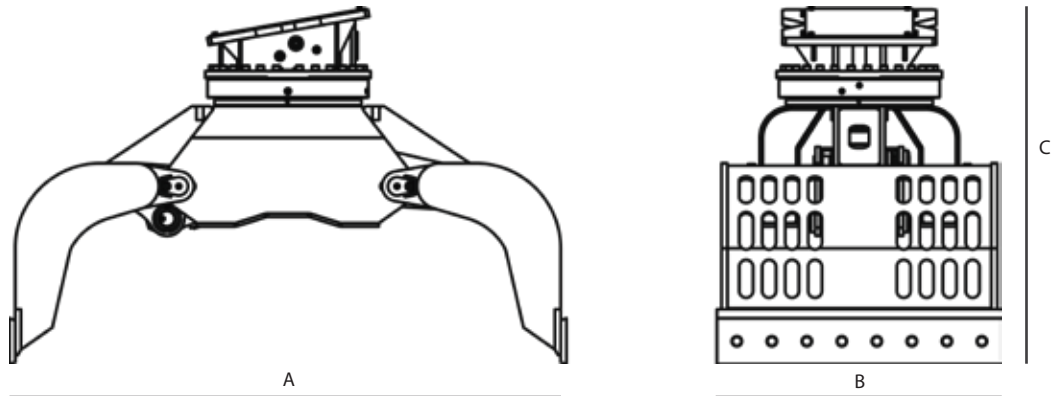

Type RG	5-N	9-N	12-N	15-N	22-N	28-N	37-N	48-N	60-N
Information									
Machine class (t)	2-5	5-9	10-15	14-18	15-22	20-28	25-37	35-48	45-60
Weight (kg)	210	425	870	1015	1305	1550	2020	2285	3860
Volume (l)	100	140	325	400	530	620	875	1100	1500
Closing force (kN)*	12	26	41	41	53	61	70	80	115
Rotar Hole-pattern	100	110-120	130-140	130-140	130-140	140-150	140-150	140-150	200
Dimensions									
Dimension A (mm)	1137	1350	1750	1830	2000	2190	2425	2425	3050
Dimension B (mm)	500	650	800	900	1000	1100	1200	1400	1500
Dimension C (mm)	703	975	1380	1420	1528	1463	1541	1566	1900
Hydraulic									
Max. operating pressure clamshell (bar)	320	320	320	350	350	350	350	350	350
Oil volume clamshell (L/min)	35	50	80	100	100	100	120	120	200
Max. operating pressure hydromotor (bar)	120	120	140	140	140	170	170	170	170
Oil volume hydromotor (L/min)	20	20	40	40	40	40	40	40	40

* Closing force by 320 Bar

Rotar International BV

Address Schering 27, 8281 JW Genemuiden (NL)
Postal address Postbus 174, 8280 AD Genemuiden (NL)

Telephone +31(0) 38 385 54 71
Fax +31(0) 38 385 54 02

E-mail info@rotar.com
Website www.rotar.com