
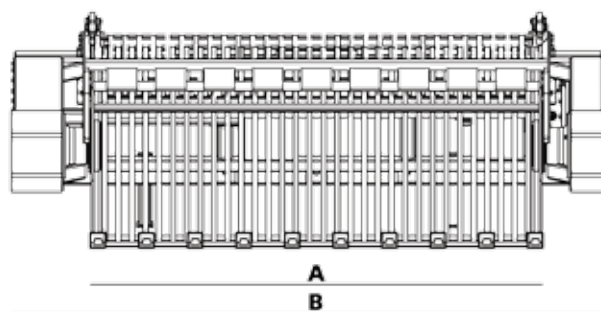


Specifications



Ingenious, reliable, service-friendly and maximal productivity. That is the power of Rotar.

Type HEX Excavator	350 M	700 S	850 S	1000 S	1400 S
Information					
Machine class (t)	7 - 12	13 - 15	15 - 20	20 - 25	25 - 35
Drum weight (kg)*	425	900	1200	1700	2150
Drum capacity (l)	350	650	870	1050	1450
Dimension A (mm)	885	1170	1585	1130	1565
Dimension B (mm)	1290	1640	2055	1750	2185
Dimension C (mm)	705	835	835	1075	1075
Oil volume (lpm)	A 75 / B 75	A 75 / B 75	A 75 / B 75	A 125 / B 125	A 125 / B 125
Operating pressure min. / max. (bar)	120 / 250	120 / 250	120 / 250	120 / 250	120 / 250
Distance between ribs (mm)	45	45	60	60	60
Rotar Hole-pattern	110 - 120	140 - 150	140 - 150	140 - 150	140 - 150

Type HPL Wheel loader	400 M	600 S	800 S	1500 S	2000 S	2500 I	3000 I
Information							
Drum weight (kg)*	385	675	875	1700	2200	2544	2780
Drum capacity (l)	400	600	800	1560	2000	2500	3000
Dimension A (mm)	1500	1600	1800	2225	2325	2580	2880
Dimension B (mm)	2035	2120	2385	2935	3025	3130	3430
Dimension C (mm)	610	705	755	1000	1120	1170	1170
Oil volume (lpm)	A 50 / B 50	A 75 / B 75	A 75 / B 75	A 125 / B 125	A 125 / B 125	A 160 / B 160	A 160 / B 160
Operating pressure min. / max. (bar)	120 / 250	120 / 250	120 / 250	120 / 250	120 / 250	120 / 250	120 / 250
Distance between ribs (mm)	45	45	45	45	45	60	60
Rotar Hole-pattern	410	420	430	450	460	470	470

* Operation pressure 20 - 60 higher with B-hydraulics

Rotar International BV

Address Schering 27, 8281 JW Genemuiden (NL)

Postal address Postbus 174, 8280 AD Genemuiden (NL)

Telephone +31(0) 38 385 54 71

Fax +31(0) 38 385 54 02

E-mail info@rotar.com

Website www.rotar.com