


Specifications

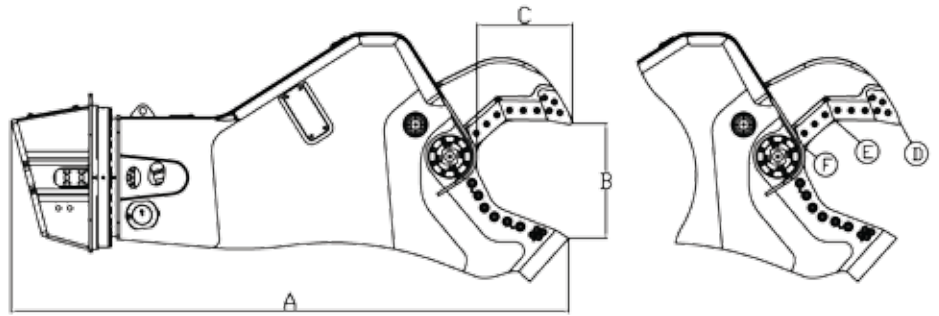

Ingenious, reliable, service-friendly and maximal productivity. That is the power of Rotar!

Type RSS	20	30	40	50	100	150
Information						
Machine class (t) on boom	16	20	25	30	45	60
Machine class (t) on dipper	21	32	38	50	65	110
Weight (kg)*	2500	3590	4440	6180	8250	12500
Rotar Hole-pattern	140 - 150	200	200	200	200	250
Dimensions						
Dimension A (mm)	2657	3275	3635	3980	4835	5450
Dimension B (mm)	445	607	750	782	947	1095
Dimension C (mm)	416	544	625	701	903	997
Cuttingforce						
Tip ** (D) (t)	130	156	168	201	242	332
Apex ** (E) (t)	240	296	319	390	467	693
Throat ** (F) (t)	532	664	813	955	1338	1995
Open / Close						
Operating pressure (bar)	350	350	350	350	350	350
Oil volume (L/min)	240	450	450	450	750	960
Rotation						
Operating pressure (bar)	170	170	170	170	170	170
Oil volume (L/min)	50	50	50	50	50	50

* Weight exclusive adapterplate with bracket specifications may change without prior notice

** Cuttingforce measured at 350 bar

Rotar International BV

Address Schering 27, 8281 JW Genemuiden (NL)

Postal address Postbus 174, 8280 AD Genemuiden (NL)

Telephone +31(0) 38 385 54 71

Fax +31(0) 38 385 54 02

E-mail info@rotar.com

Website www.rotar.com