
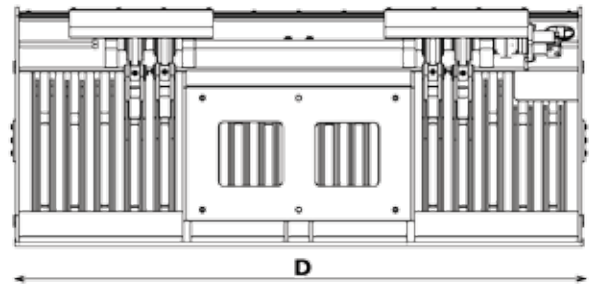


Specifications

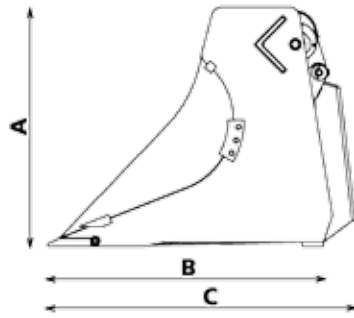

Type EVB Excavator	600 S	800 S	1200 S	1200 I
Information				
Machine class (t)	13 - 18	16 - 25	21 - 35	21 - 35
Weight (kg)*	1100	1475	1885	1895
Volume (l)	600	800	1200	1200
Rotar Hole-pattern	140 - 150	140 - 150	140 - 150	140 - 150
Dimension A (mm)	1275	1275	1275	1295
Dimension B (mm)	1400	1400	1695	1720
Dimension C (mm)	1000	1000	1140	1140
Dimension D (mm)	1200	1560	1610	1610
Max. operating pressure motor (bar)	140	140	140	140
Max. oil volume (L/min)	70 - 100*	70 - 100*	70 - 100*	70 - 100*
Max. operating pressure hydromotor (bar)	120	120	120	120
Oil volume hydromotor (L/min)	20	20	20	20

Type RVB Wheel loader	800 S	950 S	1500 S	2000 S	2300 I
Information					
Machine class (t)	4,5 - 7,5	6 - 9	7,5 - 10	10 - 12	12 - 15
Weight (kg)*	860	950	1500	1800	2260
Volume (L) SAE 1: 2	1025	1155	1650	2050	2225
Rotar Hole-pattern	430	430	450	450	460
Dimension A (mm)	935	935	1105	1105	1105
Dimension B (mm)	950	950	1136	1286	1425
Dimension C (mm)	1112 - 1214	1112 - 1214	1490	1433	1697
Dimension D (mm)	2060	2320	2420	2650	2730
Max. oil volume (L/min)	75	75	75	75	75
Max. operating pressure motor (bar)	140	140	140	140	200

* Weight exclusive adapterplate with bracket

Rotar International BV

Address Schering 27, 8281 JW Genemuiden (NL)

Postal address Postbus 174, 8280 AD Genemuiden (NL)

Telephone +31(0) 38 385 54 71

Fax +31(0) 38 385 54 02

E-mail info@rotar.com

Website www.rotar.com