SCREENING BUCKET

MB-S10 S4



A

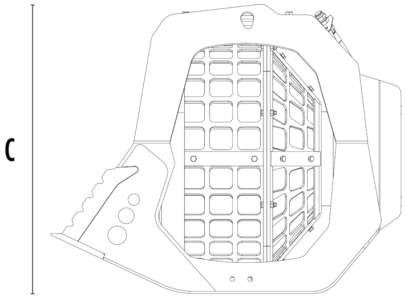

C

B

SPECIFICATIONS

Recommended excavator	ton	6 - 9
Recommended backhoe loader	ton	8 - 9*
Weight	ton	0,41
Load capacity	m³	0.32
Pressure	bar	130 - 150
Back pressure	bar	< 20
Oil flow rate**	l/min	40 - 60
Basket diameter	mm	800
Basket depth	mm	555
Size A	mm	950
Size B	mm	1220
Size C	mm	1010

* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

- Hour meter
- Basket protection kit
- 24 Month Warranty

APPLICATION AREAS

- Demolitions
- Road works
- Tunnels
- Enclosed spaces
- Pipelines
- Inert material recycling
- Excavations
- Urban construction sites
- Maintaining landscape and agricultural areas
- Forest maintenance

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice.