



SHAFTS SCREENER MB-HDS207



SPECIFICATIONS

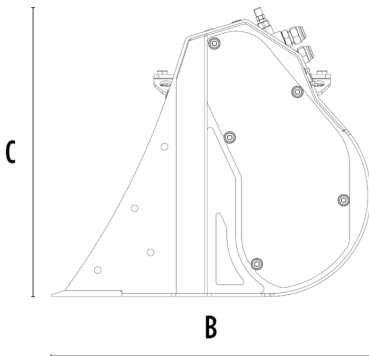


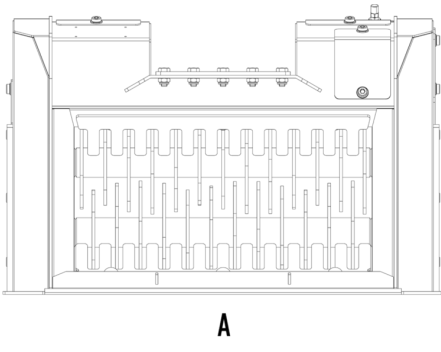

Recommended excavator	ton	1,3 - 2,8
Recommended backhoe loader	ton	3 - 4*
Weight	ton	0,098
Load capacity	m ³	0.05
Pressure	bar	200 - 220
Back pressure	bar	< 20
Oil flow rate**	l/min	25 - 35
Size A	mm	740
Size B	mm	545
Size C	mm	495

* Only compatible with the posterior boom of a Backhoe.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ15 Sifting kit	8 mm	Sifting damp/dry soil
	15 mm	Soil Aeration
 RM Mixer kit		Coal reduction
		Soil Aeration
		Compost Aeration
		Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

Load capacity increase kit	Shaft holder
24 Month Warranty	

APPLICATION AREAS

