SHAFTS SCREENER

MB-HDS220

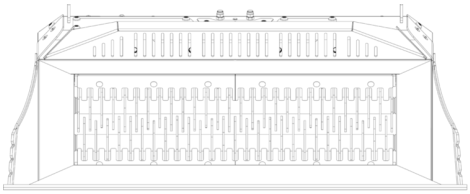

A

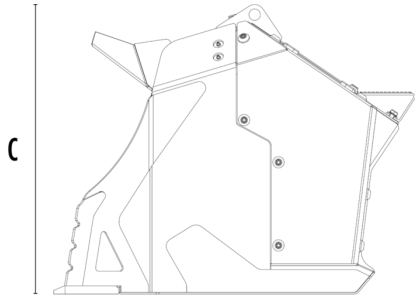

C

B

SPECIFICATIONS

Recommended backhoe loader	ton	7 - 11*
Recommended skid steer loader**	ton	4,5 - 10
Weight	ton	1
Load capacity	m³	0.6
Pressure	bar	230 - 280
Back pressure	bar	< 20
Oil flow rate***	l/min	90 - 150
Size A	mm	2220
Size B	mm	1060
Size C	mm	890

* Only compatible with the posterior boom of a Backhoe.
** Please verify machine's Rated Operating Capacity.
*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit RQ20 Sifting kit	8 mm 20 mm	Sifting damp/dry soil Soil Aeration
RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS

Road works

Tunnels

Enclosed spaces

Pipelines

Inert material recycling

Excavations

Urban construction sites

Foundries

Maintaining landscape and agricultural areas

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice.