



SHAFTS SCREENER MB-HDS312

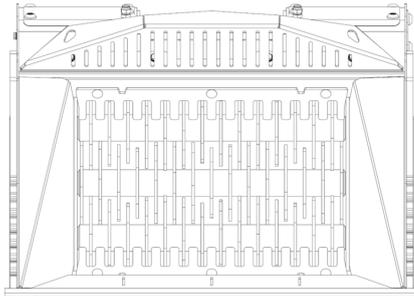

A

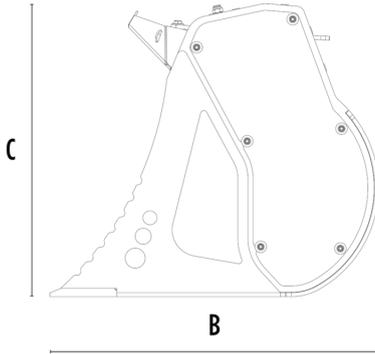

B

SPECIFICATIONS



Recommended excavator	ton	7 - 11
Weight	ton	0,72
Load capacity	m ³	0.35
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate*	l/min	75 - 100
Size A	mm	1235
Size B	mm	985
Size C	mm	880

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit  RQ50 Sifting kit	8 mm 20 mm 50 mm	Sifting damp/dry soil Soil Aeration Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RM Mixer kit		Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE8 Fine sifting kit  RE16 Fine sifting kit	8.5 mm 16 mm	Sifting damp/dry soil
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder

24 Month Warranty

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas